



## All Purpose Electrode-Type Level Switch

MYSTAR

# MYSTAR

MYT3003

### Feature

1. High precision and stability.
2. Various types of existing electrodes can be combined.
3. No electronic circuit to the sensor makes measurement suitable for materials with extreme high or low temperature.
4. No influence from cable capacitance.
5. Suitable for a micro-sized sensor.


### MYT3003 Model/Code

Spec. code		Remarks
MYT3003		
Power supply	No entry	AC100V
	-2	AC200V
	-5	DC24V

### MYT3003

Model No.	MYT3003
Measurement accuracy	±0.5 pF
Setting output	3 configurable independent contacts AC100V 1A
Operating temperature	Sensor: -273°C~+800°C
	Converter: 0~+50°C
Weight	Approx. 500g
Power supply voltage	AC100V+10% (AC200V, DC24V also available)
Power consumption	Approx. 2W

## Connection

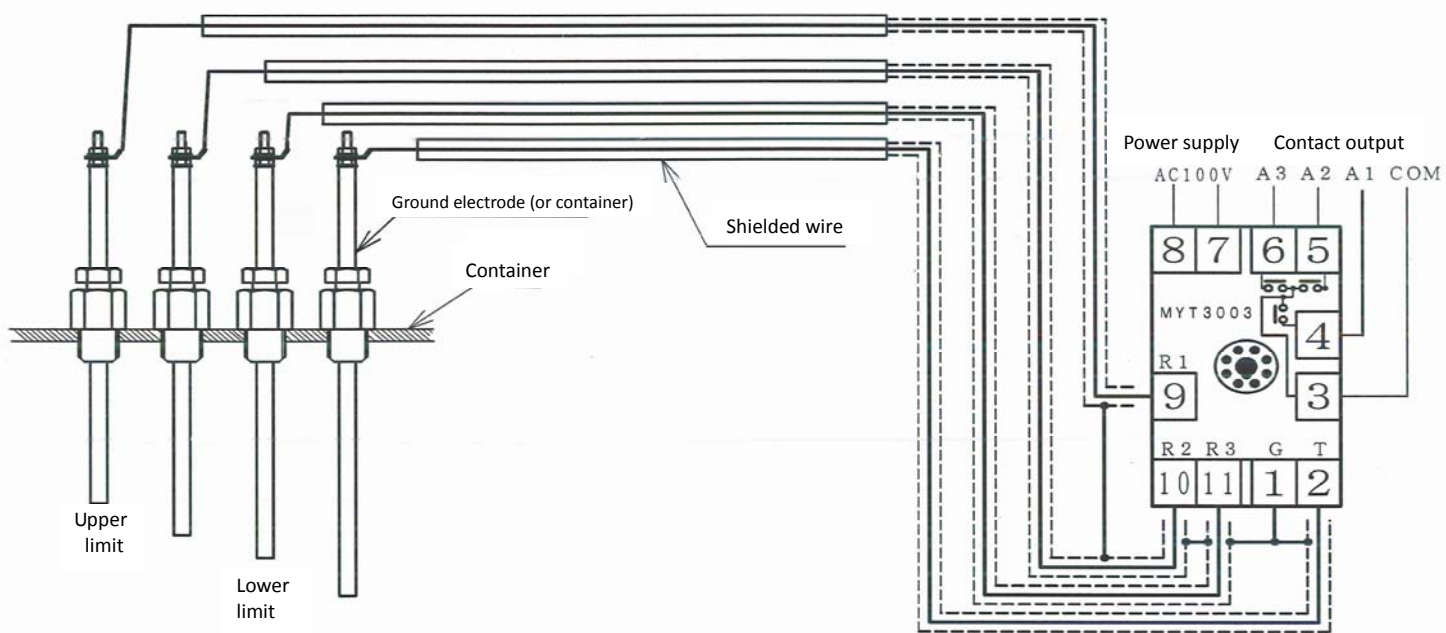

## Probes

